



Image shown with optional flex**

AMPHOR

AMPHOR is a elegant and decorative LED pendant luminaire. With its teardrop shape it creates the perfect illumination for your office break out spaces. It can be used for general lighting or can be installed as a group to create feature.

- Efficacy of up to 143lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Globe supplied with ceiling rose as standard (excluding flex**).
- Optional Flex available, In 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Emergency not available.

* Monks cap and Ceiling rose only.

**Excluding flex, see page 3 for flex options.

Technical

Product	AMPHOR
Mounting type	Pendant
Diameter	300mm 400mm
Lumens	2065 - 3871 lm
Efficacy	Up to 143 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

For information:

Amberlite Projects Ltd

The Old Chicken House, Shepherds Corner, Durweston, Blandford Forum, DT11 0QF

Tel. +44 7432422099

info@amberliteprojects.com

www.amberliteprojects.com



AMPHOR

Luminaire Order Builder

AMP3 (300mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
40 400mA 2065 Lm -14.3W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
45 450mA 2360 Lm -16.3W		4K 4000K	A1 DALI 1-100%	B RAL9005	
50 500mA 2655 Lm -18.7W			A2 DSI	S RAL9006	
55 550mA 2950 Lm -21.3W			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: AMP340O4KA1W


AMP4 (400mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
50 500mA 2945 Lm -20.7W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
55 550mA 3179 Lm -22.4W		4K 4000K	A1 DALI 1-100%	B RAL9005	
60 600mA 3468 Lm -24.5W			A2 DSI	S RAL9006	
65 650mA 3595 Lm -25.7W			A3 Switch Dim	Z Custom	
70 700mA 3871 Lm -27.7W			A4 1-10v		
			A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature and DALI driver.

Example Code: AMP460O4KA1W

AMPHOR

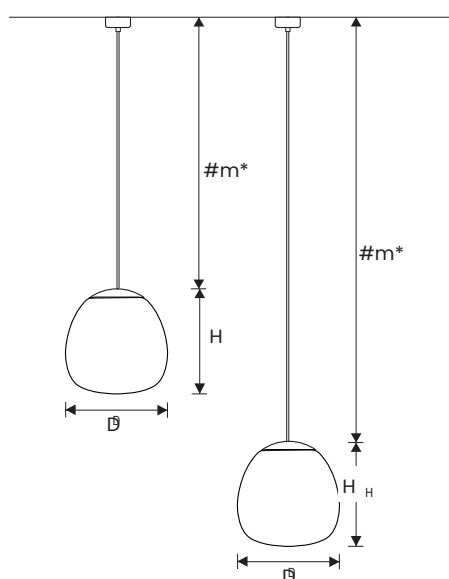

Dimensions

D Ø	H Ø	Finish	Code	Colour Swatch
300	300	Black	9016M	
400	400	Silver	9005	
		Custom*	9006	
			Custom*	

All dimensions are measured in millimetres (mm)
*Custom lengths available upon request

*Custom Colours upon request
Monks cap & Ceiling Rose only

Ancillaries

Wire Suspensions	Code	Ancillaries images
3m Wire suspension kit	GL-WS-3M	CR75 Ceiling Rose
Custom length (1m increments)	GL-WS-#M	
Clear 0.75mm², Supply Cable		
3 core, Clear, 3m	FL-3C-C-3M	
3 core, Clear, Custom Length*	FL-3C-C-#M	
5 core, Clear, 3m	FL-5C-C-3M	
5 core, Clear, Custom Length*	FL-5C-C-#M	
Black 0.75mm², Supply Cable		
3 core, Black, 3m	FL-3C-B-3M	
3 core, Black, Custom Length*	FL-3C-B-#M	
5 core, Clear, 3m	FL-5C-B-3M	
5 core, Clear, Custom Length*	FL-5C-B-#M	
White 0.75mm², Supply Cable		
3 core, White, 3m	FL-3C-W-3M	
3 core, White, Custom Length*	FL-3C-W-#M	
5 core, Clear, 3m	FL-5C-W-3M	
5 core, Clear, Custom Length*	FL-5C-W-#M	

*Please replace Z with required cut meter length.



IP20

IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class I safety class is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 Year Guarantee