



Open version



Eyelid version

DT

Wall Mounted

DT is a circular, IP65, IK10, robust, bulkhead luminaire with light pollution reducing eyelid cover, manufactured from cast aluminium with polycarbonate diffuser. Suitable for walkways, building perimeters, passageways, storage areas, car parks and building entrances.

- Efficacy of up to 135 lm/W
- Colour temperatures: 3000°k and 4000°k as standard
- Optics: Opal Polycarbonate, with open cover as standard, Eyelid cover also available
- Optional: Slimline version available*
- Colour Finishes: Grey or Black available
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v
- Wireless control options: Casambi
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel

* Please contact us for more details.

Technical

Product	DT
Mounting type	Wall Mounted
Lumens	1486 - 2472 lm
Efficacy	Up to 135 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Eyelid Open Opal
Control	DALI 1-100%, DSI, Casambi, Bluetooth, Fixed output
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

DT


Luminaire Order Builder

DT

STEP 1. Select Current	STEP 2. Optic	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Options	STEP 7. Emergency
35 350mA 1486Lm- 11.2W 40 400mA 1701Lm- 12.7W 45 450mA 1896Lm- 14.2W 50 500mA 2064Lm- 15.5W 55 550mA 2259Lm- 17W 60 600mA 2472Lm- 18.7W	EY Eyelid Opal Diffuser OP Open Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A5 Casambi	G Grey B Black	M* Microwave Sensor	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature and Open diffuser.

Example Code: DT60OP4KA1BE3

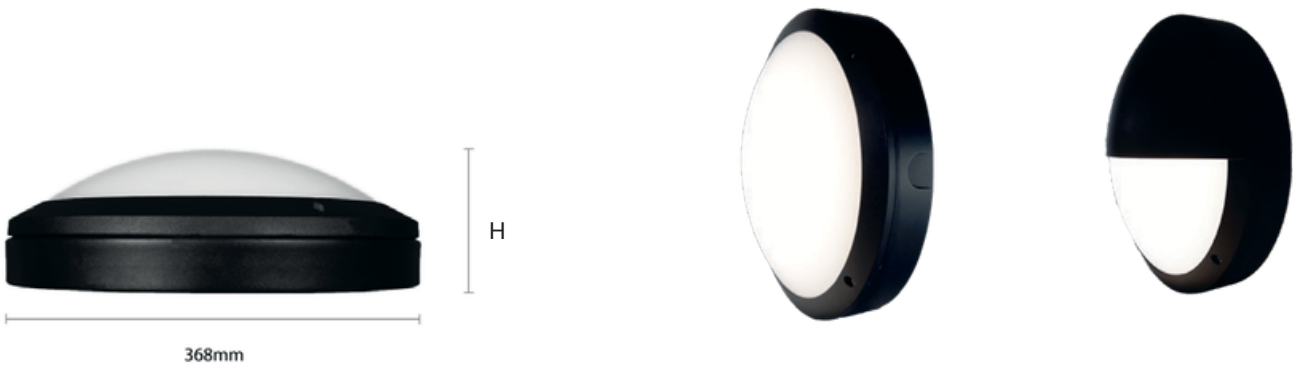

Dimensions		Finish		
DØ	H	RAL	Code	Colour Swatch
368	146	Grey	G	
368	171*	Black	B	

All dimensions are measured in millimetres (mm)
* Eyelid version only