



Moon

Moon is a decorative circular bulkhead luminaire with polycarbonate diffuser, manufactured from spun aluminium, in a 425mm diameter. Available in a range of outputs to suit your needs.

- Efficacy of up to 109 lm/W
- Colour temperatures: 3000°k and 4000°k as standard.
- Optics: Opal TP(a) Polycarbonate diffuser as standard
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request Special Colour Finishes: Anodised Chrome or Anodised Brass available on request
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v
- Wireless control options: Casambi
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel

Technical

Product	Moon
Mounting type	Surface/Wall Mounted
Diameters	425mm
Lumens	2241 - 3362 lm
Efficacy	Upto 109 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser TP(a)
Control	DALI 1-100%, DSI, 1 -10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

Moon


Luminaire Order Builder

Moon

STEP 1. Select Current	STEP 2. Optic	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
60 600mA 2241lm- 20.5W 90 900mA 3362lm- 30.7W	O Opal Diffuser TP(a)	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL 9006 AC Anodised Chrome AB Anodised Brass Z Custom	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: Moon-60-O-4K-A1-W

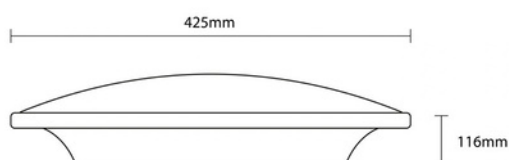

Dimensions

DØ	H	Finish	Code	Colour Swatch
425	116	White	9016M	
		Silver	9006	
		Anodised Chrome	AC	
		Anodised Brass	AB	
		Custom*	Custom*	
				

All dimensions are measured in millimetres (mm)

*Custom Colours upon request