



SAS330

SAS330 Luminaire (1390 x 300mm) is a premium LED lighting solution engineered to deliver outstanding illumination performance, visual comfort, and energy efficiency. Designed for modern commercial, education, healthcare, and office environments, the SAS330 combines high-quality light output with exceptional efficacy to help reduce energy consumption without compromising on performance.

- Efficacy of up to 131lm/W
- LG7 Compliant, UGR<19 microprism diffuser.
- AGP or P52 microprism diffuser options.
- Colour temperatures: 4000°k.
- Colour Finishes: White (9016) as standard, Other RAL colours available upon request.
- Dimming options: DALI 1-100%.
- Emergency options: Standard 3hr

Technical

Product	SAS330
Mounting type	Recessed
Lumens	2798- 3561 Lm
Efficacy	Up to 131lm/W
Colour Temperature	Neutral White (4K)
Optics	Microprism (UGR<19)
Control	DALI 1-100%,
Emergency	3 hour
Rendering	Ra80
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

SAS330

Luminaire Order Builder

SAS330-AGP


STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Current	Optics	CCT	Control	Finish	Emergency
27 275mA 2798 Lm- 21.3W 30 300mA 3053 Lm- 23.3W 35 350mA 3561 Lm- 27.2W	M Microprism UGR<19 (AGP)	4K 4000K	A1 DALI 1-100% Dim	W RAL9016M	E3 Standard 3 Hour

All electrical and optical data subject to $\pm 10\%$ tolerances.
 Values based on 4000K Colour temperature, AGP Microprism diffuser
 and DALI driver.


SAS330-P52

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Current	Optics	CCT	Control	Finish	Emergency
30 300mA 2683 Lm- 23.3W	M Microprism UGR<19 (P52)	4K 4000K	A1 DALI 1-100% Dim	W RAL9016M	E3 Standard 3 Hour

All electrical and optical data subject to $\pm 10\%$ tolerances.
 Values based on 4000K Colour temperature, P52 Microprism diffuser
 and DALI driver.

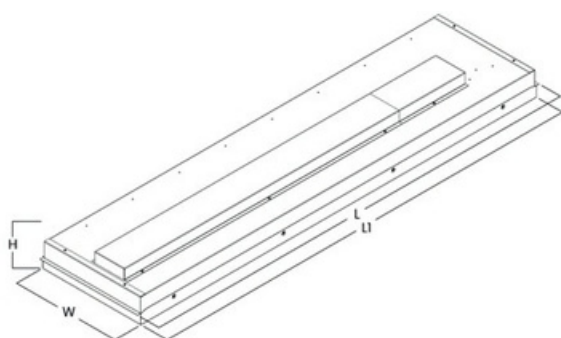

Dimensions

L	LI	W	H	Finish	Code	Colour Swatch
1408	1390	300	102	White	9016M	
				Custom*	Custom*	

All dimensions are measured in millimetres (mm).

*Custom Colours upon request