



TL70

TL70 is an sleek architectural cylindrical downlight. Constructed with extruded aluminium housing with cast aluminium heat sink and aluminium reflector. Suspended version can be mounted at various heights, to create an architectural feature.

- Efficacy of up to 124lm/W
- Colour temperatures: 3000°k or 4000°k as standard
- Colour Finishes: White (9016), Black (9005), Other RAL colours, available on request.
- Available in 10°, 14°, 35° or 55° beam angles to suit your application
- Dimming options: DALI 1-100%
- Wireless control options: Casambi
- Emergency options: Not Available

Technical

Product	TL70
Mounting type	Surface Suspended
Diameter	70mm
Lumens	Up to 1316lm
Efficacy	Up to 124lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Beam Angles	10°
	14°
	35° 55°
Dimming	DALI 1-100%, Casambi
Emergency	Not Available
Rendering	Ra80
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


TL70

Luminaire Order Builder

TL70

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
SF Surface FS Flex suspended	20 200mA 877 Lm ~ 7.0W 25 250mA 1097 Lm ~ 9.0W 30 300mA 1316 Lm ~ 10.5W	10 10° degree beam 14 14° degree beam 35 35° degree beam 55 55° degree beam	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A5 Casambi	W RAL9016M + White Reflector B RAL9005 + Black Reflector Z Custom	- Not Available

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, CRI80 and 55° Beam.
CRI90 available upon request.

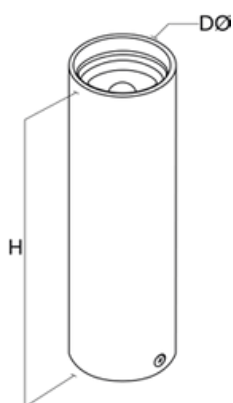

Dimensions

D Ø	H	Finish	Code	Colour Swatch
76	250	White	9016M	
		Black	9005	
		Custom*	Custom*	

All dimensions are measured in millimetres (mm)

*Custom Colours upon request

TL70

TL70-FS Ancillaries

Clear 0.75mm², Supply Cable		Decorative Ceiling Rose	
3 core, Clear, 3m	FL-3C-C-3M		
3 core, Clear, Custom Length*	FL-3C-C-ZM		
5 core, Clear, 3m	FL-5C-C-3M		
5 core, Clear, Custom Length*	FL-5C-C-ZM		
Black 0.75mm², Supply Cable			
3 core, Black, 3m	FL-3C-B-3M		
3 core, Black, Custom Length*	FL-3C-B-ZM		
5 core, Black, 3m	FL-5C-B-3M		
5 core, Black, Custom Length*	FL-5C-B-ZM		
White 0.75mm², Supply Cable			
3 core, White, 3m	FL-3C-W-3M		
3 core, White, Custom Length*	FL-3C-W-ZM		
5 core, White, 3m	FL-5C-W-3M		
5 core, White, Custom Length*	FL-5C-W-ZM		
Decorative Ceiling Rose		Installation options	
Silver RAL9006	CR-120-I-S	Single suspended light	
Black RAL9005	CR-120-I-B	Suspended Cluster feature Light	
White RAL9016	CR-120-I-W		
Custom RAL Colour**	CR-120-I-Z		
*Please replace Z with required cut meter length.			
**Please replace Z with required Custom RAL Colour.			

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.