




Ultralux



Ultralux-O

Ultralux is a contemporary office luminaire, designed for exposed T ceiling grids. Manufactured from powder coated sheet steel, with central micropism or opal optics, with curved indirect wings.

- Efficacy of up to 111 lm/W
- UGR<19 diffuser*
- Colour temperatures: 3000°k, 4000°k
- Suitable for 15mm T ceiling as standard, other types available on request
- Colour Finishes: White (9016) as standard (Other colours available on request).
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v
- Wireless control options: Casambi
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel

* UGR 19 diffuser available on special request.

Technical

Product	Ultralux
Mounting type	Recessed
Lumens	2110 - 5822 lm
Efficacy	Up to 111 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output 3 hour, DALI, Self-Test, DALI Wireless Sentinel
Emergency Rendering	Ra80+
IP Rating	IP20
safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K



Ultralux

Luminaire Order Builder


Ultralux

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Select Current	Optic	CCT	Control	Finish	Emergency
50 500mA 3944 Lm - 32.3W 55 550mA 4339 Lm - 33.5W 60 600mA 4733 Lm - 38.7W 65 650mA 5128 Lm - 42W 70 700mA 5522 Lm - 45.2W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016 Z Custom	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature and Opal diffuser.

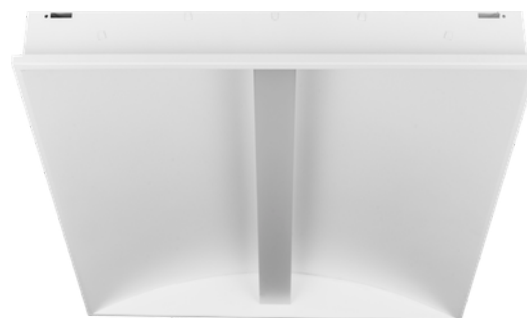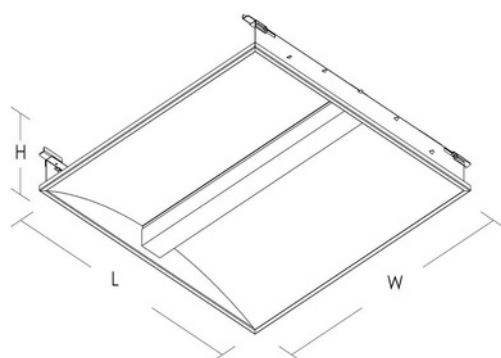


Dimensions

L	W	H	RAL	Code	Colour Swatch
595	595	65	White	9016M	
			Custom*	Custom	

All dimensions are measured in millimetres (mm)

Finish

RAL	Code	Colour Swatch
White	9016M	
Custom*	Custom	

*Custom Colours upon request.