



VODE-C

VODE-C is a slimline linear LG7 UGR<19, Constant current dark light luminaire, with Its unique compact design, and quick tool free cable connectors, provides efficiencies of up to 148lm/W.

- Efficacy of up to 148 lm/W
- Versions: 4 Pocket or 7 Pocket
- Colour temperatures: 2700°k, 3000°k and 4000°k as standard
- Colour Finishes: White (9016) or Black (9005) Louvre & bevel finishes as standard Dimming option: DALI 1-100%
- Wireless control options: Casambi
- CRI 80 as standard, CRI 90 available on request

Technical

Product	VODE-C
Mounting type	Recessed
Pockets	4 Cell 7 Cell
Lumens	Upto 1800 Llm
Efficacy	Up to 148 lm/W
Colour Temperature	Soft White (27K) Warm White (3K) Neutral White (4K)
Optics	Clear diffuser Opal diffuser
Beam Angle	35° 50° 80°
Dimming	DALI 1-100%, Fixed Output, Casambi
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

VODE-C

Luminaire Order Builder

VODE-C4 (4 Pocket)


STEP 1. Select Current	STEP 2. Optics	STEP 3. Beam	STEP 4. CCT	STEP 5. Control	STEP 6. Bezel	STEP 7. Reflector	STEP 8. Emergency
20 200mA 751 Llm - 4.9W	C Clear Diffuser	35 35° Degree beam	27K 2700K	FO Fixed Output	W RAL9016	WR White Reflector	- Not Available
25 250mA 931 Llm - 6W	O Opal Diffuser	50 50° Degree beam	3K 3000K	A1 DALI 1-100% Dim	B RAL9005	BR Black Reflector	
30 300mA 1111 Llm - 7.5W		80 80° Degree beam	4K 4000K	A5 Casambi			

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, CRI80, Clear Diffuser and Black louvre.

VODE-C7 (7 Pocket)

STEP 1. Select Current	STEP 2. Optics	STEP 3. Beam	STEP 4. CCT	STEP 5. Control	STEP 6. Bezel	STEP 7. Reflector	STEP 8. Emergency
20 200mA 1217 Llm - 8.5W	C Clear Diffuser	35 35° Degree beam	27K 2700K	FO Fixed Output	W RAL9016	WR White Reflector	- Not Available
25 250mA 1507 Llm - 11W	O Opal Diffuser	50 50° Degree beam	3K 3000K	A1 DALI 1-100% Dim	B RAL9005	BR Black Reflector	
30 300mA 1800 Llm - 13W		80 80° Degree beam	4K 4000K	A5 Casambi			

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, CRI80, Clear Diffuser and Black louvre.

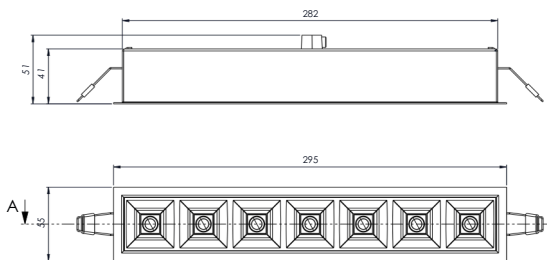

Dimensions

L	W	H	Finish	Code	Colour Swatch
155*	55	41 (51 Inc Cable restraint)	White	9016M	
295**	55	41 (51 Inc Cable restraint)	Black	9005	

All dimensions are measured in millimetres (mm)
*Ceiling cutout = 145x45mm
**Ceiling cutout = 285x45mm